


# Linkage Shear (GLS) **POWER**Series

## FEATURES

- 1 "Rhino horn" aids in positioning material for processing
- 2 Common pivot group and pinning points accommodate the full line of Power Series linkage tools with one stiff arm - the mounting pad remains in place
- 3 Shrouded heavy-duty pivot design provides structural strength and long-term durability
- 4 The GLS stands upright for easy attachment changes and convenient storage and transport
- 5 Built with Weldom steel for the best combination of structural strength and wear durability
- 6 Four-way indexable guide blades, razor blade and primary blades provide four useable cutting edges
- 7 Patented bolt-on piercing tip is replaced in minutes without grinding or welding
- 8 Stiff arm and mounting pad included

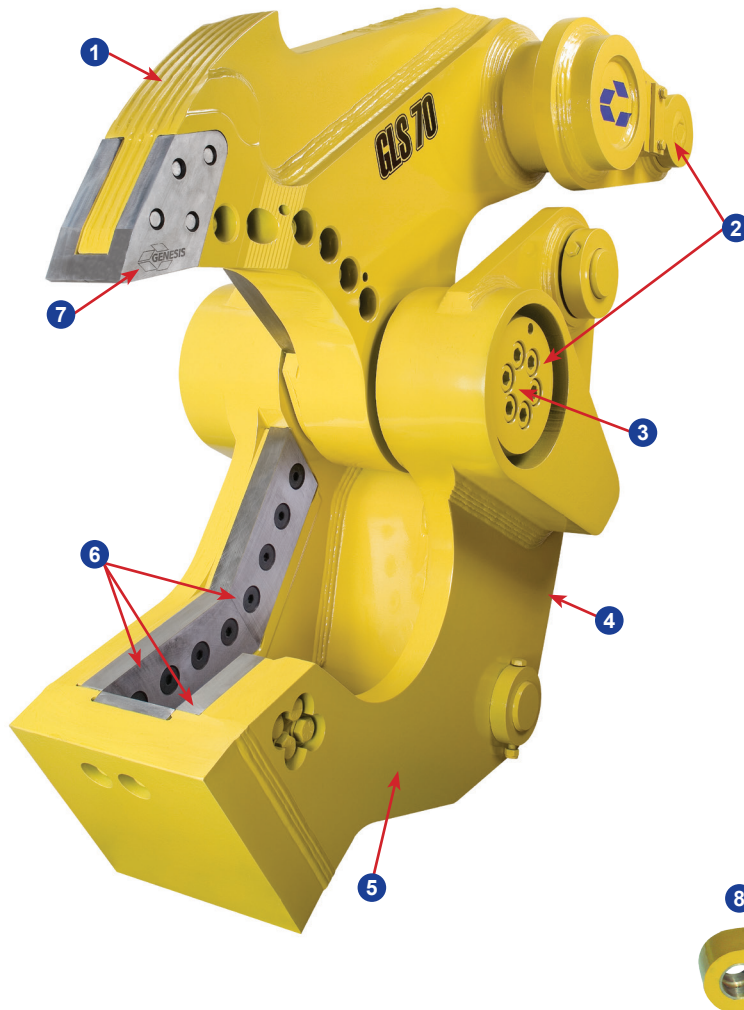

## APPLICATIONS

- Scrap Processing
- Demolition
- C&D Processing
- Concrete Recycling



| Model  | Weight*<br>(lbs.) | Jaw Opening**<br>(ins.) | Jaw Depth<br>(ins.) | Excavator Weight<br>(lbs.) |
|--------|-------------------|-------------------------|---------------------|----------------------------|
| GLS 50 | 4,100             | 21                      | 21                  | 40,000 - 60,000            |
| GLS 70 | 4,696             | 24                      | 24                  | 60,000 - 80,000            |
| GLS 90 | 5,313             | 27                      | 27                  | 80,000 - 110,000           |

\*Weight includes mounting bracket and stiff arm.

\*\*Jaw opening varies slightly depending on excavator mounting location.

Genesis linkage attachments are not compatible with quick couplers. Contact Genesis for more information.

All Genesis Linkage Shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty.

Genesis reserves the right to continually make product improvements designed to positively enhance performance.