


DemoPro (GDP)



FEATURES

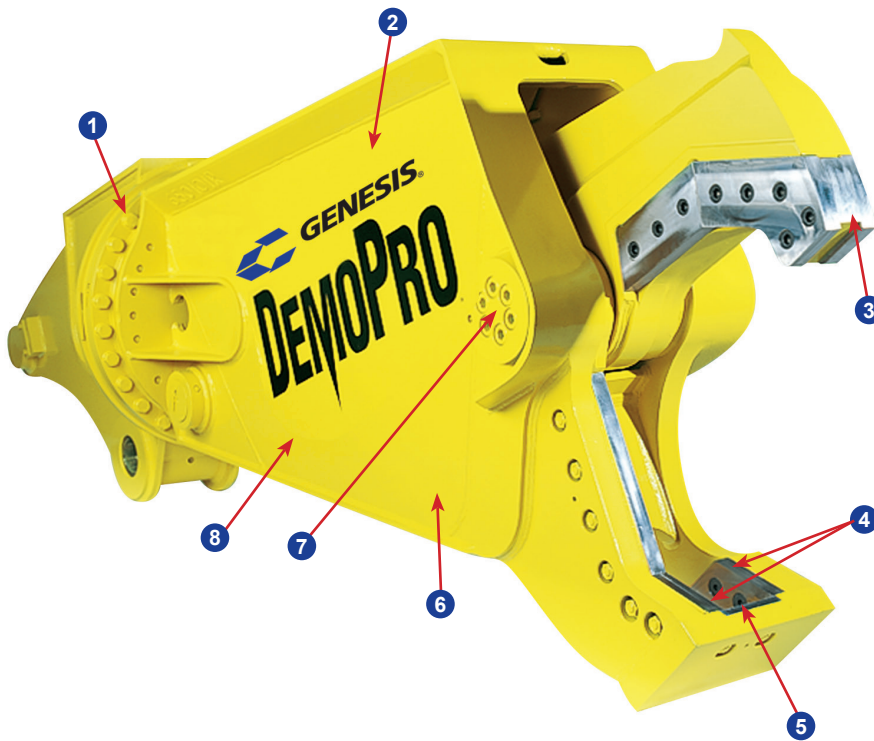

- 1 360° rotation is standard with every DemoPro
- 2 Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems
- 3 Patented bolt-on piercing tip is replaced in minutes without grinding or welding
- 4 Exclusive dual guide blade system accommodates heat expansion at the tip while maintaining tighter tolerances where the primary cutting blades pass
- 5 Four-way indexable guide blades, razor blade and primary blades provide four useable cutting edges
- 6 Enclosed structure adds strength and rigidity while protecting the cylinder
- 7 Shrouded heavy-duty pivot design provides structural strength and long-term durability
- 8 Built with Weldox steel for the best combination of structural strength and wear durability

APPLICATIONS

- Demolition
- Bridge Dismantling and Processing
- Concrete Recycling



| Model | Weight* | Jaw Opening | Jaw Depth | Reach** | Minimum Excavator Wt. | |
|----------|---------|-------------|-----------|------------|-----------------------|-------------|
| | | | | | Boom Mount | Stick Mount |
| | (lbs.) | (ins.) | (ins.) | (ft. ins.) | (lbs.) | (lbs.) |
| GDP 450 | 4,500 | 24 | 21 | 8' 6" | 25,000 | 45,000 |
| GDP 650 | 7,600 | 28 | 25 | 9' 2" | 42,000 | 68,000 |
| GDP 900 | 11,500 | 38 | 36 | 11' 2" | 68,000 | 98,000 |
| GDP 1200 | 14,400 | 42 | 40 | 14' 0" | 88,000 | 120,000 |

*Weight includes mounting bracket to attach to excavator.

**Distance is measured from the attachment mounting pivot (boom or stick) forward.

Every Genesis DemoPro is covered by a 12-month, 1,500-hour (whichever occurs first) warranty.

Genesis reserves the right to continually make product improvements designed to positively enhance performance.